



# SOLDIM BH62K878DH

- Flux of this product has heat resistability and powder doesn't easily flow and isn't easily oxidized.
- This solder paste has good wettability compared with conventional product.
- Fluiditic characteristic of this product is stable and printability is good.

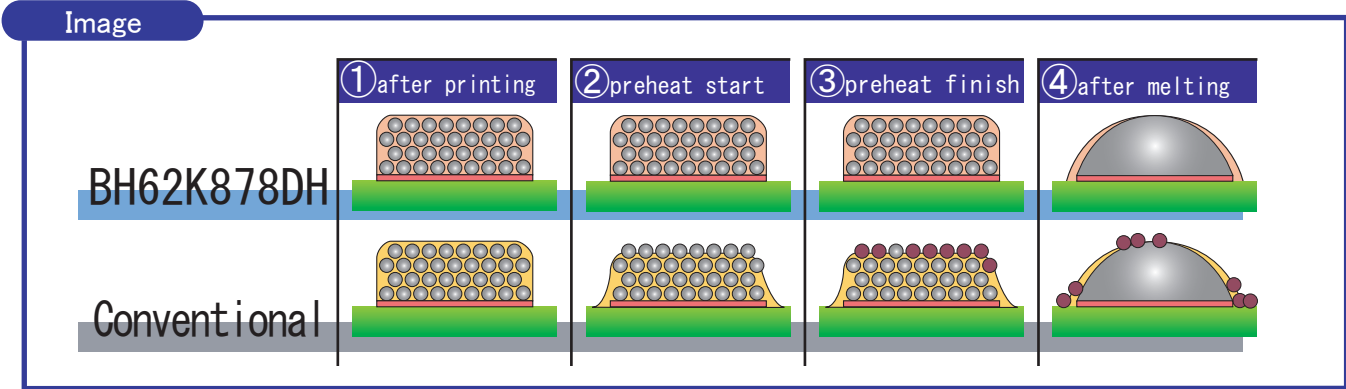


## High preheat wettability test

This product has good wettability in high preheat.

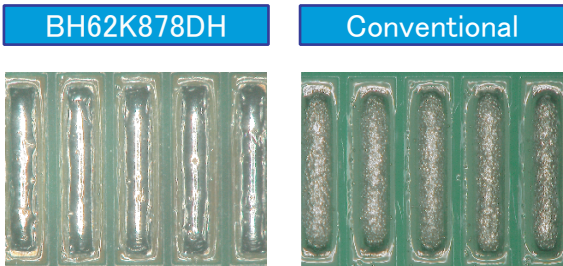


## Wetting test

This product has good wettability.

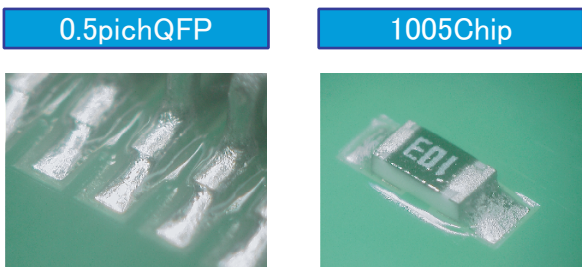

## Printing test


This product has good printability.

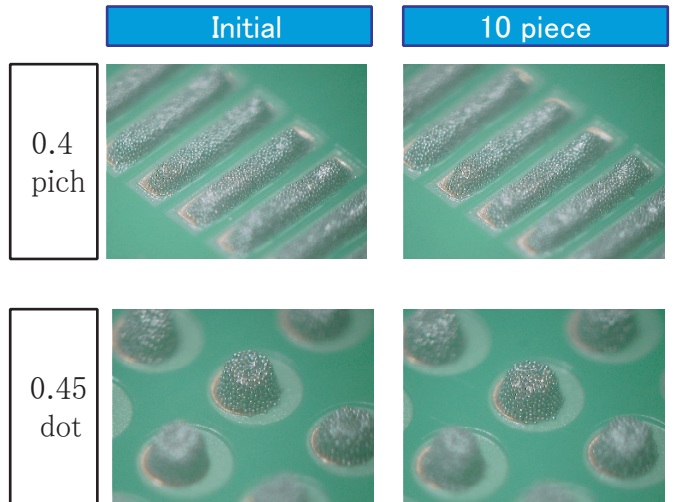

Condition Velocity: 30mm/s


## Void test

This product has less void.

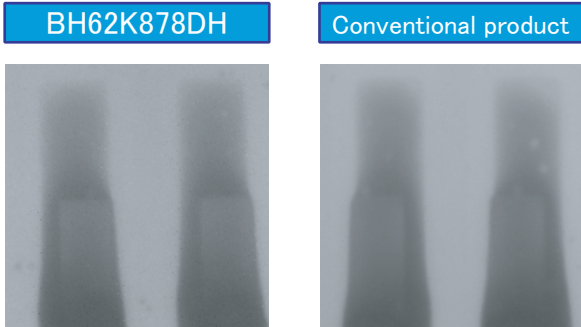


## Tackiness Test

Tackiness of this product is stable over long time.

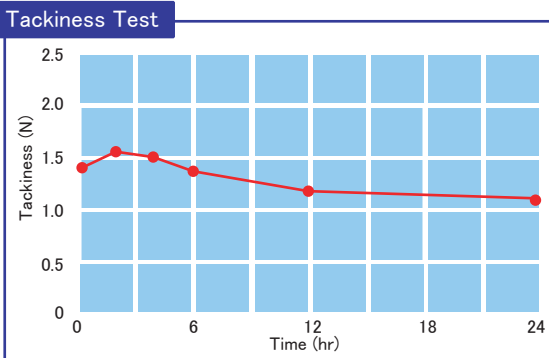

Test condition: 25°C

## Recommendable temperature profile

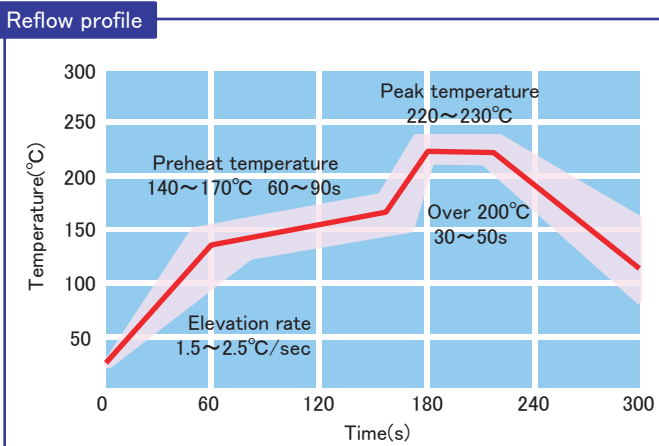

## Characteristic Data

Characteristic data of BH63K878DH is shown below.

Product name	BH62K878DH
Alloy composition(%)	Sn:62, Ag:2, Pb:Balance
Melting point(°C)	178~190
Powder particle size(μm)	38~25
Halide content(%)	0.14※ <sub>1</sub>
Flux contents(%)	9.9
Spreading ratio(%)	93
Copper plate corrosion test	Pass
Insulation resistance test(Ω)	≥5.0x10 <sup>8</sup>
Viscosity(Pa·s)	190
Thixotropy index	0.57
Tackiness test	>24Hr
Storage stability	6 months (Under 10°C)

※ Above values are typical value.

※<sub>1</sub> This solder paste contain non-ionic halide activator.

## Precautions

- Please keep solder paste in cold storage such as 0 to 10°C. If it is left in hot condition, it may cause changing of Viscosity or hygroscopic inferior.
- Please restore the temperature of paste to room condition ahead of using.(It is required about three hours)
- Please stir the solder paste homogeneously by mixer before using.(We suggest the mixing time at 90sec. by Japan Unix machine, or at 10 minutes by Malcom machine.)
- Please do not mix used solder paste with virgin paste.
- Please close up the opened bottle of solder paste to restore in refrigerator.
- After printing, please re-flow the solder paste as soon as possible.
- Please choose the suitable re-flow condition which meets to the solder paste. The flux happens to carbonization by unsuitable re-flow condition, also it is no good for insulation resistance. The profile is different because it depend on thermal capacity of chips and board, you should consider enough to determine the profile.
- Please do not touch the paste by bare-handed and inhale the gas by soldering.

ISHIKAWA METAL CO.,LTD

7-21 Chikko Hamadera Nishimachi, Nishi-ku, Sakai-City, Osaka

592-8352 JAPAN

Telephone +81-72-268-1155 Facsimile +81-72-268-1159

<http://www.ishikawa-metal.com>