

Solder For PC, Mobile




EVASOL J3-MKT-3

- Lead free
- MIL-RMA
- IPC-ROL1
- ISO-1.1.2.X
- JIS-A

- Good wettability &
- Low spattering
- Less smoke & smell

Excellent Wettability

● Wettability test for through hole pad

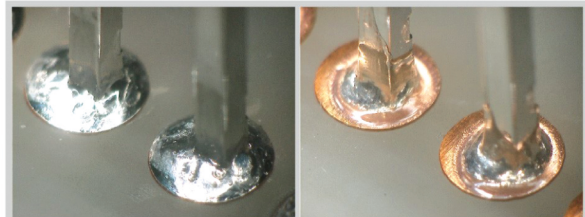

J3-MKT-3

Conventional product

By soldering robot, connector soldering in through hole by fix low temp and short time.

【Condition】 Iron temp.:330°C Soldering time:1.6sec




SUPER ROSIN 60/63GXM

- Tin lead
- MIL-RMA
- IPC-ROL1
- ISO-1.1.2.X
- JIS-A

- Good activated power & high wettability speed
- Low spattering

Good wettability, workability in short time

● High speed soldering by Robot

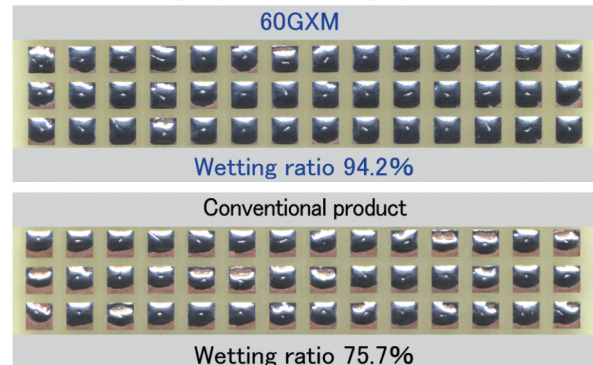

60GXM

Wetting ratio 94.2%

Conventional product

Wetting ratio 75.7%

FOR LASER

EVASOL J3-DTR-4

- Lead free
- MIL-RMA
- ISO-1.2.2.X
- IPC-REL1
- JIS-AA

- Solder for light beam heating device and laser
- Low spattering so that laser iron rod is clean.

Water Soluble Flux

SUPER ROSIN 60/63WSM

- Tin Lead
- MIL-WSF-1
- ISO-2.1.2.Y
- IPC-REH1
- JIS-B

- Flux residue can clean by normal water
- Excellent Wettability

Workability

EVASOL J3-MTS-4

- Lead free
- MIL-RMA
- ISO-1.1.2.X
- IPC-ROL1
- JIS-A

- Fast workability and Good Wettability
- Low soldering temp & Good Wettability

No Spattering

EVASOL J3-MRK-4

- Lead free
- MIL-RMA
- ISO-1.1.2.X
- IPC-ROL1
- JIS-A

- No Spattering
- PCB & all devices are clean